


# Pumping Solutions For Chemical/Pharma/Food/Beverage Industries



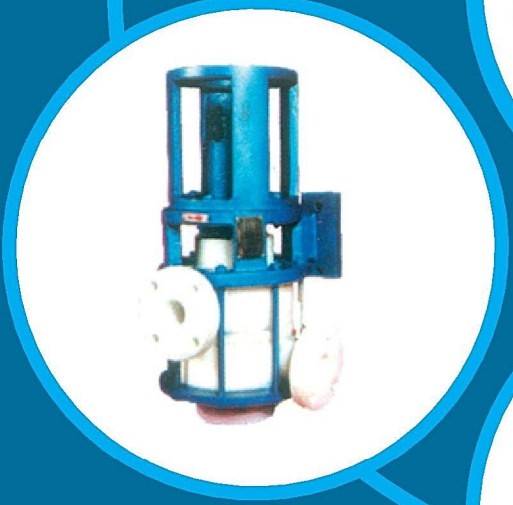

### CHEMICAL PROCESS PUMPS

Capacity : Up to 600m<sup>3</sup>/Hr  
 Head : Up to 100 Mts.  
 Moc : SS-316(CF8M), SS-304(CF8), SS-316L(CF3M), Alloy-20, Hastalloy-B,C, Cast Steel(WCB), Castron, etc.  
 Application : Organic / Inorganic Chemicals, Process Liquids, Solvents, Treated Effluent, Phosphates, Nitric Acid, Thermic Fluid Ammonia and Edible Oil Applications, Food Processing etc.



### POLY PROPYLENE PUMPS

Capacity : Up to 100m<sup>3</sup>/Hr  
 Head : Up to 60 Mts.  
 Moc : Poly Propylene, UHMW-PE (Ultra High Molecular Weight Poly Ethylene)  
 Application : Loading & Unloading of HCL, Dilute Sulphuric Acid, Caustic Liquid Scrubbing, Effluent Treatment, Descaling, Pickling in Steel rolling mills, Ejector Systems etc.,

Available in 1440 and 2900 RPM



### UTILITY PUMPS

Capacity : Up to 600m<sup>3</sup>/Hr  
 Head : Up to 100 Mts.  
 Moc : Cast Iron, Cast Steel, SS-316(CF8M), SS-304 (CF8) etc.,  
 Application : Cooling Towers, Brine Applications, Hot Oil Applications, Water Pumping, Fire Fighting, Effluent Evaporation Plants, Paper & Pulp etc.,



### PVDF LINED / PTFE LINED PUMPS

Capacity : Up to 100m<sup>3</sup>/Hr  
 Head : Up to 60 Mts.  
 Moc : PVDF, FEP, PFA & PTFE  
 Application : Very high corrosive liquids with greater temperature, chlorinated Solvents, aromatic, organic compounds, alcohols, Ejector System etc.,



### SELF PRIMING PUMP

Capacity : Up to 100m<sup>3</sup>/Hr  
 Head : Up to 60 Mts.  
 Moc : SS-316 (CF8M), SS-304(CF8), Cast Steel (WCB)  
 Application : De-watering, Drum Unloading, Effluent, Chemicals & Solvents From underground tank and Slurry etc.,



### VERTICAL SUBMERSIBLE PUMP

Capacity : Up to 200m<sup>3</sup>/Hr  
 Head : Up to 50 Mts.  
 Moc : Cast Iron, Cast Steel, SS-316(CF8M), SS-304(CF8) etc.,  
 Application : Sewage & Sludge, Industrial Chemicals, Fertilizers & Effluent Under ground Solvent tanks, Highly Volatile Liquids.

Sturdy Design, Long Life, Low Maintenance, High Efficiency



### VERTICAL GLAND PUMPS

Capacity : Up to 100m<sup>3</sup>/Hr  
 Head : Up to 70 Mts.  
 Moc : Poly Propylene, UHMW-PE  
 Application : Corrosive and Abrasive Fluids, Suitable for Scrubbers and Ejector Systems and Effluents etc.,

Without stuffing box & Seal leakproof and maintenance free pumping



- Special Applications Pumps are available on request
- All Pumps are available in 1440 & 2900 RPM
- All Metallic Pumps available with open / Semi Open Impellers to handle slurries
- All standard pumps are available with ex-stock delivery

## PROFIK PUMPS PVT LTD.,

S.F.NO:208, DOOR NO:5,  
 ANJUGAM NAGAR,CHINNAVEDAMPATTI,  
 COIMBATORE-641 049.  
 TAMILNADU, INDIA.

MOBILE NUMBER: +91 9944935349  
 EMAIL ID: profikpumpssales@gmail.com;  
 info@profikpumps.com; sales@profikpumps.com

URL: www.profikpumps.com

